

The diagram given in Fig. 1 allows determination of the actual standing ratio as a function of the cable attenuation.

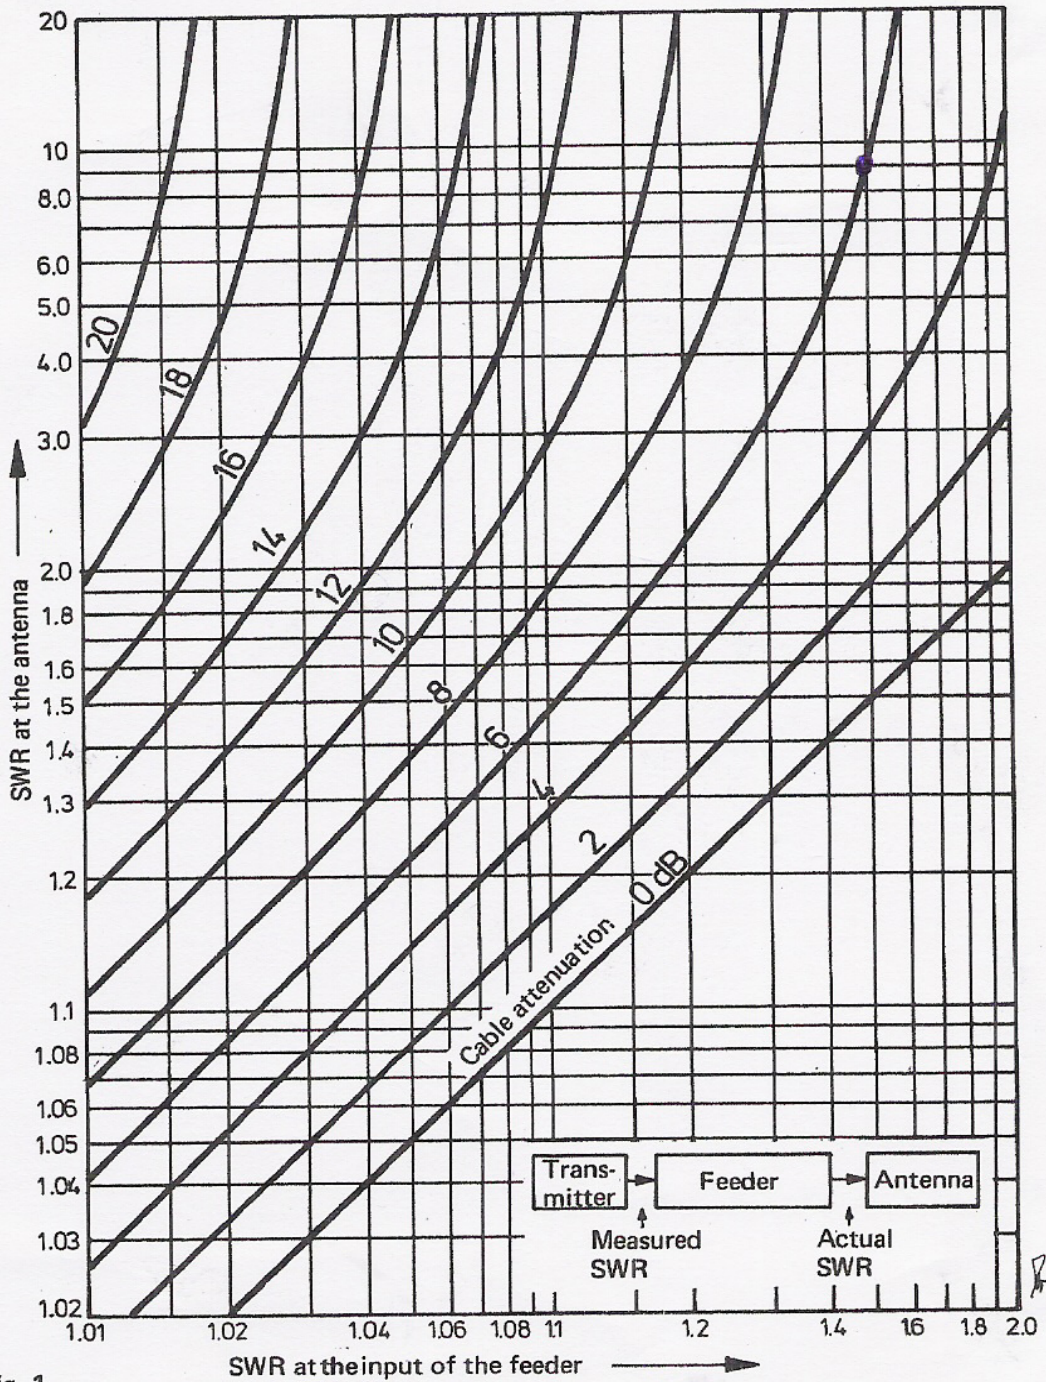


Fig. 1